



## PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING



New cooling welding time indicator

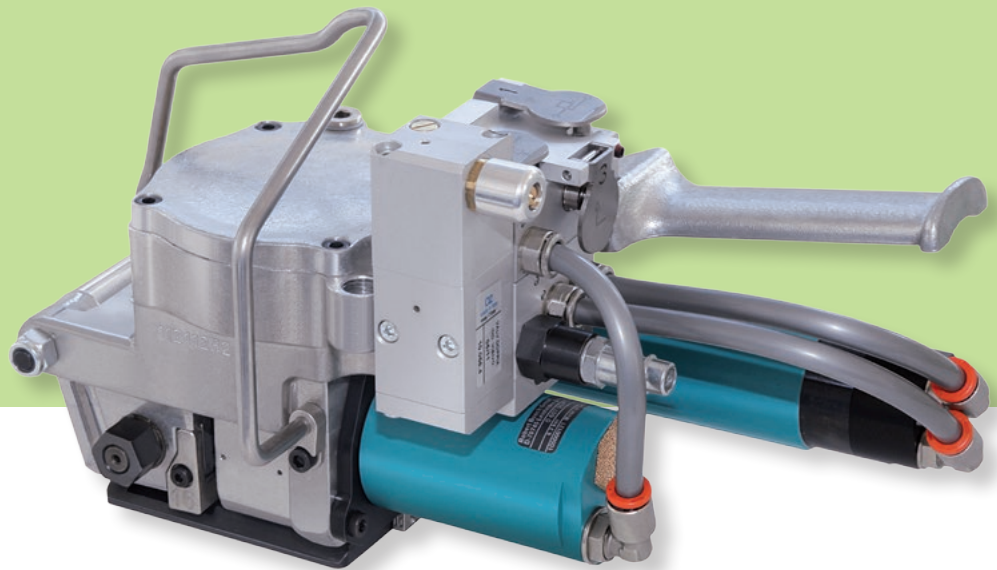

TECHNICAL SPECIFICATIONS	
<b>DIMENSIONS</b>	
Length	300 mm • 11"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	5.1 Kgs • 11.2 lbs
<b>FEEDING</b>	
Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s - 29 cuft/min
<b>PERFORMANCE</b>	
Max. tension force	5000 N - 6.5 bar - 92 psi 6000 N - 6.5 bar - 92 psi
Tensioning speed	6 mt/min ITA12-T129933 4 mt/min ITA12-T129953
Sealing	Vibration sealing
Joint strength	80% of breaking strength*

\* variable according to strap type

MODEL			
CODE	TYPE	STRAP	THICKNESS
T129933	ITA12 / 16-19 mm	PET	1-1.4 mm • 0.04"-0.055"
		16-19 mm • 5/8"-3/4"	
T129953	ITA12 / 19 mm	PET	1-1.4 mm
		19 mm	

### POLYESTER STRAP



### POLYESTER STRAP

